


NMC-PC2UCO2T-XXX-C-GY

NIKOMAX

2 , 110-RJ12/6P6C, LSZH, USOC,

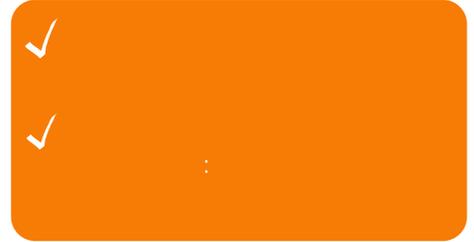

(-)

NMC-PC2U 02 -XXX-C-GY
110

3,
110

USOC,
RJ12/6P6C -

0,5 5

110, 2

RJ12 / 6P6C



NMC-PC2UCO2T-XXX-C-GY

_____ :

1 .

_____ :

110: NMC-CB110-50NL, NMC-CB110-100NL,
NMC-CB110-50L, NMC-CB110-100L

110: NMC-RB110-100, NMC-RB110-200

110: NMC-CC110UD4-100, NMC-CC110UD5-100

: NMC-OV500-2, NMC-OV900-2

: NMC-OK400-2, NMC-OK600-2, NMC-OK800-2,
NMC-OP450-2, NMC-OP700C

	NMC-PC2UC02T-XXX-C-GY
	110 - RJ12/6P6C
	, 3-6
	USOC
	3
	16
	2
, AWG()	24 (7 0,186)
	(PE)
	0,95
	LSZH
	4,6
	-
	: ISO/IEC 11801, EN 50173, TIA/EIA 568
	10BASE-T, 100BASE-TX, 100BASE-T4, ATM-25, ATM-51, ATM-155, 100VG-AnyLan, TR-4, TR-16 Active, TR-16 Passive
	-20 +60. -20 +50
	1
	-

					, 3	
NMC-PC2UC02T-005-C-GY	3	110 - RJ12/6P6C	USOC	0,5	0,000228	0,014
NMC-PC2UC02T-010-C-GY	3	110 - RJ12/6P6C	USOC	1	0,000285	0,028
NMC-PC2UC02T-015-C-GY	3	110 - RJ12/6P6C	USOC	1,5	0,000320	0,032
NMC-PC2UC02T-020-C-GY	3	110 - RJ12/6P6C	USOC	2	0,000355	0,036
NMC-PC2UC02T-030-C-GY	3	110 - RJ12/6P6C	USOC	3	0,000380	0,064
NMC-PC2UC02T-050-C-GY	3	110 - RJ12/6P6C	USOC	5	0,000570	0,088

